


ALL NEW! DATSUN 2000 SPORTS CAR

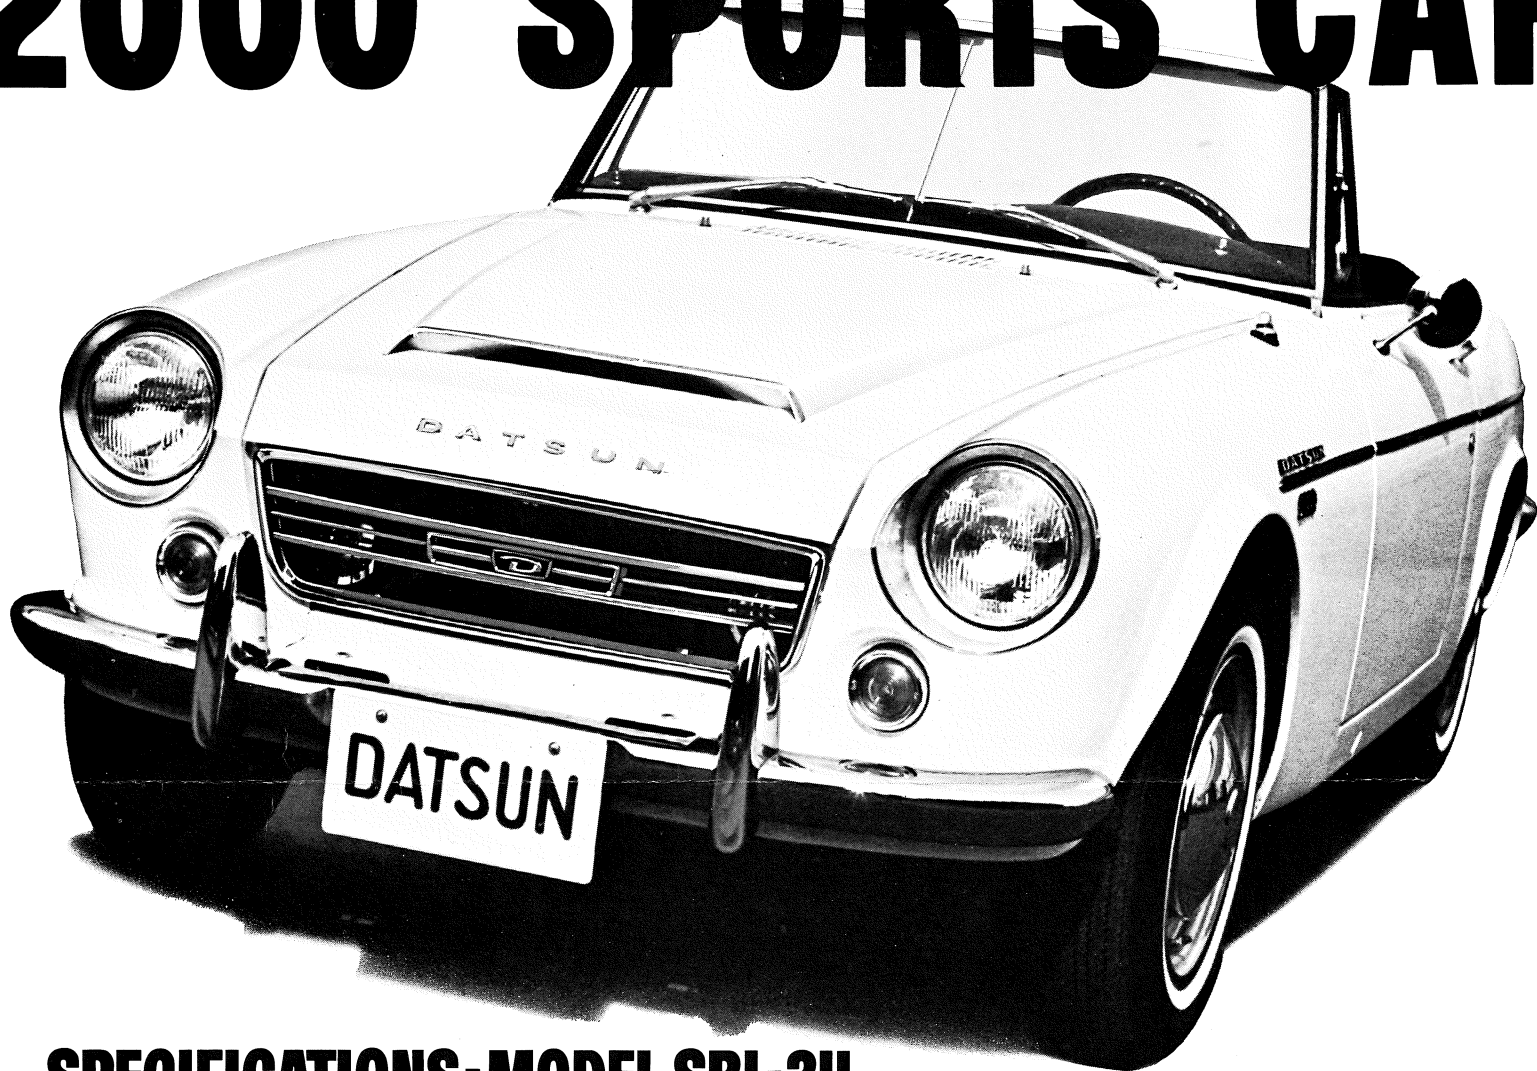

SPECIFICATIONS-MODEL SRL-3II

ENGINE

OHC—4 cyl—1982 cc
5 main bearings
Bore—3.433"
Stroke—3.267"
Compression—9.5 to 1
Horsepower—SAE 135
@ 6,000 RPM*
Ignition—12 volt
Alternator—300 watt

TRANSMISSION

5 speed, full synchro

DIFFERENTIAL

Hypoid—semi-floating
Ratio: 3.89 standard

STEERING

Cam and lever—14.8—1 ratio
Turn circle—32 ft.

WHEELS AND TIRES

4 lug steel wheels
560S-14—4 ply whitewall

SUSPENSION

Front—Independent coil spring
telescopic double action
shock and stabilizer bar
Rear—Live axle, parallel
Semi-elliptical springs and
double action shocks
Single—top mounted trac-
tion stabilizer bar

BRAKES

Front disc—11.18" diameter
Rear—Al-fin drum—9"—leading &
trailing shoes

DIMENSIONS

Wheelbase—89.8"
Track front—50.2"
rear—47.24"
Overall length—155.7"
Overall width—58.9"
Overall height—51.6"
Weight—2006 lbs.

STANDARD EQUIPMENT

Radio; Heater; Carpeting; Bucket
Seats; Seat and Shoulder Belts;
Large Dial Tachometer; Sun Visors;
Electric Windshield Washer; Ciga-
rette Lighter and Ashtray; Lockable
Floor Console; Glove Compartment;
Race-type Steering Wheel; Self-
cancelling Turn Signals; Trip Odom-
eter; Inside Mirror; Outside Fender
Mirror; Vinyl Upholstery; Whitewall
Tires; Key-locking Doors, Trunk,
Locking Gas Cap; Tonneau Cover;
Back-up Lights; Spare Tire; Bumper
Over Riders

DEALERS, PARTS AND SERVICE
COAST TO COAST

drive a
DATSUN
then decide!

*150 H.P. with high performance kit.

Prices and specifications subject to change without notice. □ Nissan Motor Corp. in U.S.A. Gardena, Calif.; Secaucus, New Jersey; Houston, Texas. □ Printed in U.S.A.
Form No. 300A